

UNION
CARBIDE

FIRST QUARTERLY REPORT
SECONDARY ZINC-OXYGEN CELL FOR SPACECRAFT
APPLICATIONS

(23 JUNE, 1966 - 23 SEPT., 1966)

CONTRACT NO. : NAS-5-10247

for

GODDARD SPACE FLIGHT CENTER
GREENBELT, MARYLAND

Prepared by

UNION CARBIDE CORPORATION
CONSUMER PRODUCTS DIVISION
RESEARCH LABORATORY-PARMA, OHIO

FACILITY FORM 602	N67-25837	
	(ACCESSION NUMBER)	(THRU)
	26	1
	(PAGES)	(CODE)
	CR-83853	03
	(NASA CR OR TMX OR AD NUMBER)	(CATEGORY)

FIRST QUARTERLY REPORT
SECONDARY ZINC-OXYGEN CELL FOR SPACECRAFT
APPLICATIONS


(23 JUNE, 1966 - 23 SEPT., 1966)

CONTRACT NO.: NAS-5-10247

for

GODDARD SPACE FLIGHT CENTER
GREENBELT, MARYLAND

APPROVED BY:

A handwritten signature in cursive script, appearing to read "R. A. Powers", is written over a horizontal line.

R. A. Powers, Director

CONSUMER PRODUCTS DIVISION
RESEARCH LABORATORY
PARMA, OHIO

TABLE OF CONTENTS

	<u>Page No.</u>
ABSTRACT	1
INTRODUCTION	2
DISCUSSION	2
A. Description of Electrodes	2
1. Oxygen Electrode	2
2. Zinc Electrode	3
B. Unit Cell	4
1. Unit Cell Construction	4
2. Unit Cell Performance	6
NEW TECHNOLOGY	12
PROGRAM FOR NEXT REPORTING INTERVAL	12
CONCLUSIONS AND RECOMMENDATIONS	12
BIBLIOGRAPHY	13

LIST OF ILLUSTRATIONS

	<u>Page No</u>
Figure 1 - Cut-Through Thin "Fixed-Zone" Electrodes	3
Figure 2 - Detached View of Zinc-Oxygen Unit Cell	5
Figure 3 - 24-Hour Discharge of Zinc-Oxygen Unit Cell with 0.4 Ampere Current	6
Figure 4 - 1st Discharge of Zinc-Oxygen Unit Cell	9
Figure 5 - 4th Discharge of Zinc-Oxygen Unit Cell	9
Figure 6 - 9th Discharge of Zinc-Oxygen Unit Cell	10
Figure 7 - 12 Discharge of Zinc-Oxygen Unit Cell	10
Figure 8 - 14th Discharge of Zinc-Oxygen Unit Cell	11

LIST OF TABLES

Table I - Description of Unit Test Cell	4
Table II Rechargeability of Zinc-Oxygen Unit Cell	7
Table III Performance of Unit Zinc-Oxygen Rechargeable Cell Over a Range of Current Output	8

ABSTRACT

Development of a 16 AH unit zinc-oxygen test cell has been completed during the first quarter covered by this report. The ampere hour rating is based upon the 19.2 grams of zinc actually used in the first test cells and represents the calculated theoretical capacity. Optimization of these cells will be carried out in further work. "Lucite" has been used as the material of construction to permit visual observation of the wetproof back side of the "fixed-zone" oxygen electrode as well as the two electrolyte chambers on either side of the charging electrode during the period of cell cycling.

Characterization of cell performance at the twenty-four hour rate is now in progress using a nickel screen charging electrode. Cell performance studies at the two-hour rate have begun. Characterization of cell rechargeability has also been initiated on a two-hour discharge, six-hour charge cycle. This work has now undergone fourteen complete cycles while cell characterization at the twenty-four hour rate has progressed through the sixth complete cycle. The unit zinc-oxygen cell was also operated at discharge currents ranging up to 6.9 amperes. Performance of the first test cells under these conditions clearly indicated its capability of meeting high rate discharge requirements.

* * *

INTRODUCTION

The technical approach employed in conducting the effort of this quarter is based upon Union Carbide's background experience in fuel cell technology, in the "Air Cell," and in rechargeable battery systems. The zinc-oxygen system was selected as the best system for meeting the requirements of spacecraft applications because of its high theoretical energy density, 541 watt-hours/lb. The state-of-the-art of the primary zinc-oxygen systems for certain applications has now approached 200 watt-hours/lb.

Even with the expected reduction in energy density because of the gas container requirement for conversion of the system from a primary to a secondary battery, the zinc-oxygen system still appears superior to other systems which have a higher theoretical energy density.

The oxygen electrodes employed as a starting point in our present work are the thin "fixed-zone" electrodes developed over a period of years by Union Carbide for fuel cell batteries. The zinc electrodes being used in the initial cells are those that have been developed for use in high rate zinc-oxygen batteries. The feasibility of using inorganic as well as organic separators will also be examined.

Unit cell development was completed during the present quarter. Cell performance was determined at several discharge rate levels. Performance data obtained clearly indicated the zinc-oxygen system's capability of delivering the high rate requirements of spacecraft applications.

DISCUSSION

A. Description of Electrodes


1. Oxygen Electrode

The oxygen electrode employed in the unit cell is of the thin "fixed-zone" type that has been described by Kordesch and coworkers (1-7) in work done by Union Carbide for other Government Agencies, in which the electrochemically active carbon layer is applied to a thin, but strong, porous metal backing. Thus, the structural characteristics of the metal

backing are mated with the electrochemical characteristics of carbon to produce a low-cost, high-performance electrode. This thin electrode is schematically illustrated in Figure 1. The porous nickel backing allows the ready transport of oxygen to the reaction site. However, permeation of electrolyte through the porous nickel is prevented by wetproofing treatment. This electrode does not rely on a sensitive pressure balance with attendant sensor problems to maintain the gas-liquid interphase at an appropriate level in the structure. Rather a stable interphase is an inherent characteristic of such a hydrophobic electrode. As expected, no electrolyte permeation through the electrode to the porous nickel backing has been seen in any of the unit cells built and operated to date.

FIGURE 1

CUT-THROUGH THIN "FIXED-ZONE" ELECTRODES

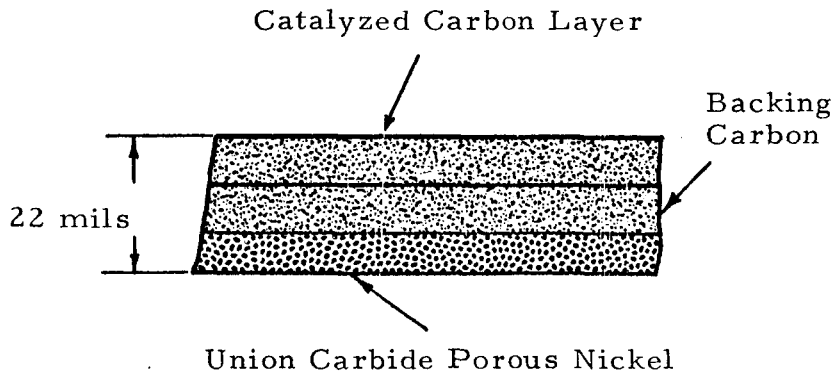

D-1704

2. Zinc Electrode

The zinc electrodes used in the unit cells built to date for this project are those developed within Union Carbide in previous work directed toward both development of the primary zinc-oxygen battery system and rechargeable zinc electrodes. Work conducted prior to the present contract efforts has shown that such an electrode is capable of successful performance at current drains at least as high as those represented by the two-hour discharge rate of the present spacecraft applications.

B. Unit Cell

1. Unit Cell Construction

The construction of the unit cells built is that shown schematically in Figure 2 and described in detail in Table I. "Lucite" was purposely selected as the material of construction of the unit cell body so that it would be possible to visually observe the back of both the oxygen electrode and the zinc electrode as well as to be able to look into the electrolyte chambers of the cell itself during the various phases of cell cycling. An expanded nickel metal screen electrode, serving as the charging electrode, has been interposed between the zinc electrode and the oxygen electrode with appropriate separators. Charging is therefore carried out between this charging electrode and the zinc electrode so that the oxygen electrode can be excluded from the charging circuit.


TABLE I

DESCRIPTION OF UNIT TEST CELL

	<u>Dimension</u>	<u>Weight</u>
"Fixed-Zone" Oxygen Electrode	3" x 3" x 0.022"	10 g
Non-Woven Cellulosic Separator	3" x 3" x 0.008"	
Expanded Nickel Metal Charging Electrode*	3" x 3" x 0.020"	2.6 g
Non-Woven Cellulosic Separator	3" x 3" x 0.012"	
Zinc Electrode	3" x 3" x 0.125"	19.2 g
Electrolyte:	<u>Composition</u>	<u>Amount</u>
	38% KOH + 3.5% ZnO	33 ml
Oxygen Source	Oxygen Cylinder	
* Exmet 2/0		

FIGURE 2

DETACHED VIEW OF ZINC-OXYGEN UNIT CELL

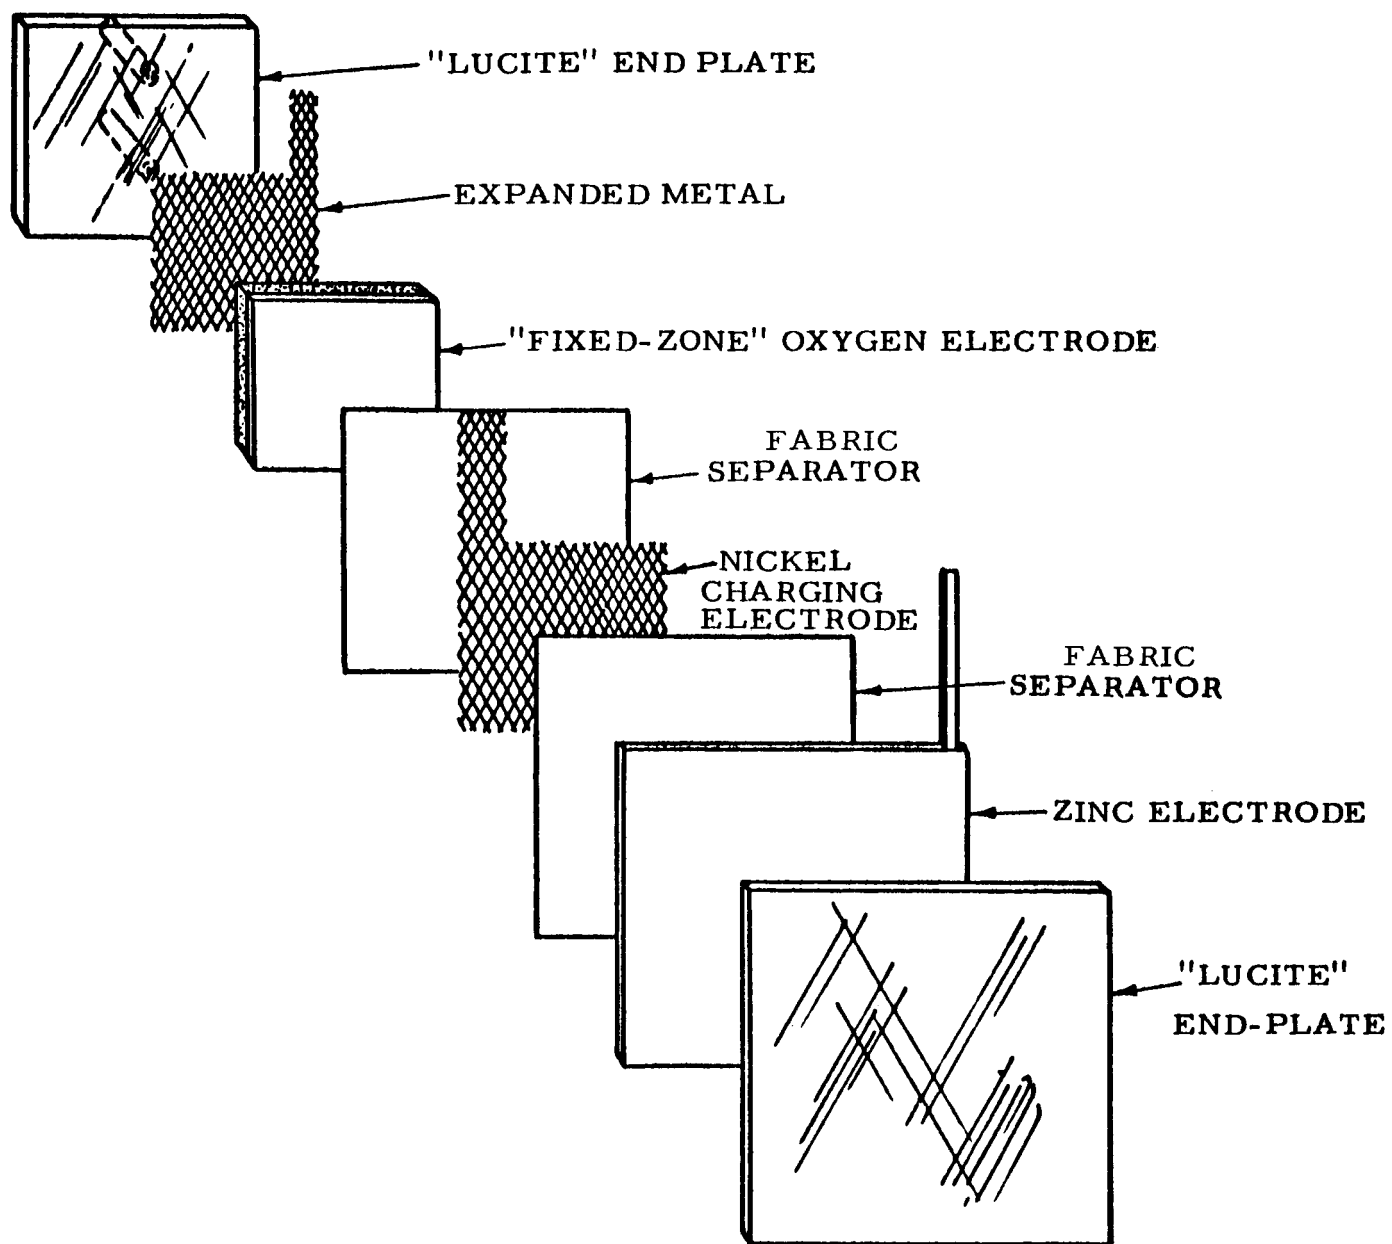


2. Unit Cell Performance

Characterization of the unit cell has been conducted on a twenty-four hour discharge, twenty-four hour charge cycle. This has progressed through the sixth cycle at the present time. Figure 3 shows a typical discharge curve obtained.

FIGURE 3

24-HOUR DISCHARGE OF ZINC-OXYGEN UNIT CELL WITH
0.4 AMPERE CONSTANT CURRENT

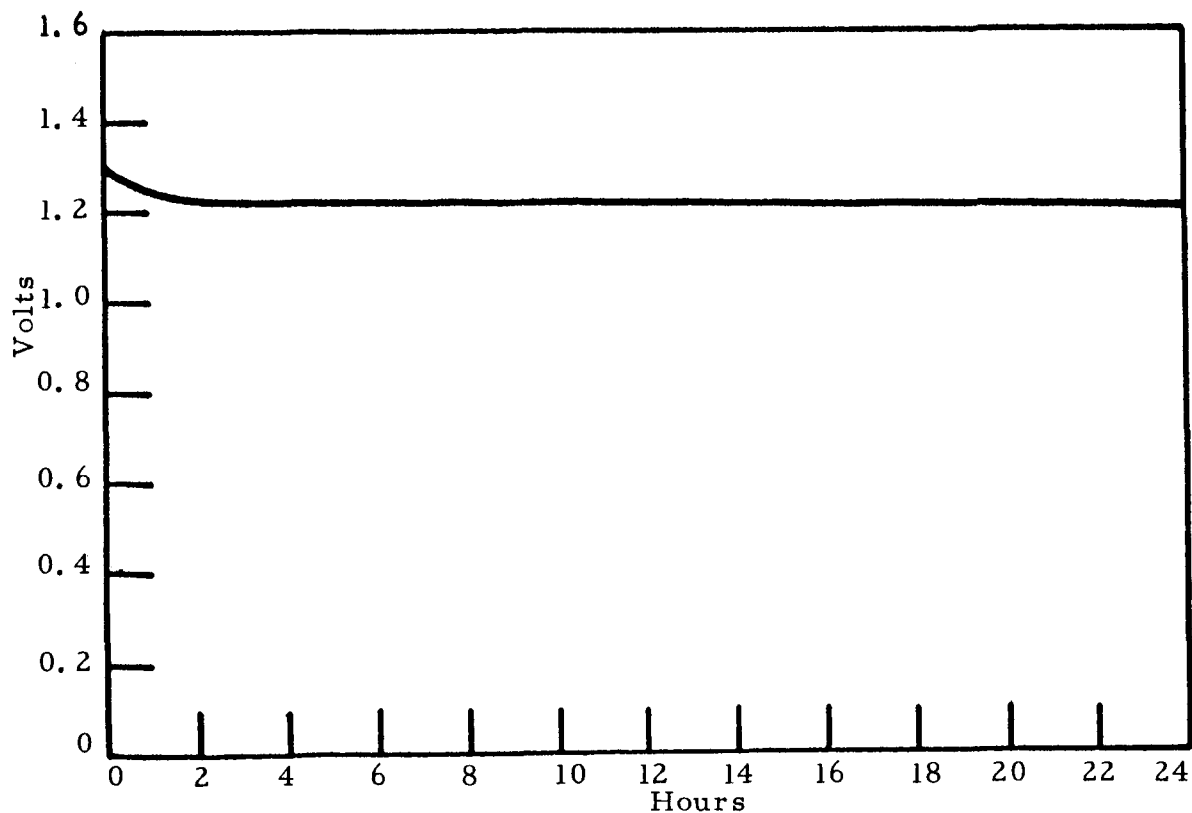

A study of unit cell rechargeability on a two-hour discharge, six-hour charge cycle has also been initiated. Typical performance of the initial unit cell is presented in Table II.

TABLE II
RECHARGEABILITY OF ZINC-OXYGEN UNIT CELL
(2-Hour Discharge, 6-Hour Charge Cycle)

Cycle Number	Discharge (average)			Discharge-Output (Across 0.75Ω for 2 hrs)	Charge-Input (6 hrs at 0.5 amps)
	Voltage	Current	Apparent Current Density		
1	1.17 volts	1.56 amps	26.9 ma/cm ²	3.12 amp-hrs	3.00 amp-hrs
2	1.17	1.56	26.9	3.12	3.00
3	1.17	1.56	26.9	3.12	3.00
4	1.14	1.52	26.2	4.94*	3.00
5	1.13	1.51	26.0	3.02	3.00
6	1.13	1.51	26.0	3.02	3.00
7	1.11	1.48	25.5	2.96	3.00
8	1.11	1.48	25.5	2.96	3.00
9	1.10	1.47	25.4	2.94	3.00
10	1.09	1.45	25.1	2.90	3.00
11	1.08	1.44	24.8	2.88	3.00
12	1.07	1.43	24.7	2.86	3.00
13	1.06	1.41	24.3	2.82	3.00
14	1.05	1.40	24.2	2.80	3.00

* Cell was discharged for 3.25 hours

This table shows that the unit cell delivered an average of 1.56 amperes at an average potential of 1.17 volts during the first three discharge cycles for periods of two hours. On the fourth cycle, the cell was allowed to discharge for 3.25 hours and delivered an average current of 1.52 amperes at an average potential of 1.14 volts. Thus, while the depth of discharge of the cell was increased from 3.12 ampere-hours during the first three discharges to 4.94 ampere-hours during the fourth discharge, the average potential at which the

current was delivered dropped only from 1.17 volts to 1.14 volts. Subsequent discharges were for a period of two hours each across a fixed resistor of 0.75 ohm. The ampere-hour output slowly decreased by the fourteenth cycle. On the fourteenth discharge the cell delivered 2.80 ampere-hours over a period of two hours at an average current of 1.40 amperes and an average potential of 1.05 volts. Cell charge input for each cycle was 3.00 ampere-hours. Graphs of the first, fourth, ninth, twelfth and fourteenth discharges followed by their respective charges are presented in Figures 4-8 inclusive. Oxygen evolved on charge was not contained for discharge. The oxygen source used was a cylinder with a reduction valve. The amount of oxygen used was not measured but should be essentially the theoretical amount required from previous fuel cell experience with this oxygen electrode.

The performance of the unit oxygen-zinc cell has also been evaluated at current drains above those already reported. This work is summarized in Table III below. These data clearly indicate that the oxygen-zinc system is easily capable of meeting the high-rate discharge requirements posed by the spacecraft applications.

TABLE III

PERFORMANCE OF UNIT ZINC-OXYGEN RECHARGEABLE CELL
OVER A RANGE OF CURRENT OUTPUT*


Current Output Amperes	Apparent Electrode Current Density ma/cm ²	Sustained Potential Volts**
0.42	7.2	1.29
0.56	9.6	1.26
0.82	14.1	1.23
1.52	26.2	1.14
2.67	46.0	1.00
3.64	62.7	0.91
4.50	77.6	0.84
5.20	89.7	0.78
5.92	102.0	0.74
6.35	110.0	0.68
6.90	119.0	0.64

* This cell discharged successively for 5-minute intervals at each current output level. Total capacity delivered was 3.2 ampere-hours.

** Voltage at end of each 5-minute interval.

FIGURE 4


1ST DISCHARGE OF ZINC-OXYGEN UNIT CELL

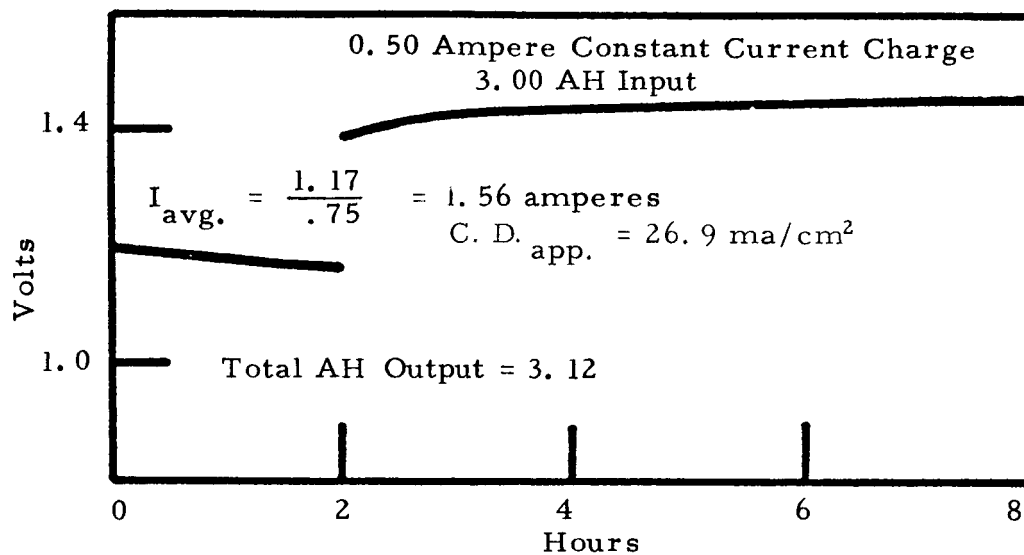

C-3158

FIGURE 5


4TH DISCHARGE OF ZINC-OXYGEN UNIT CELL

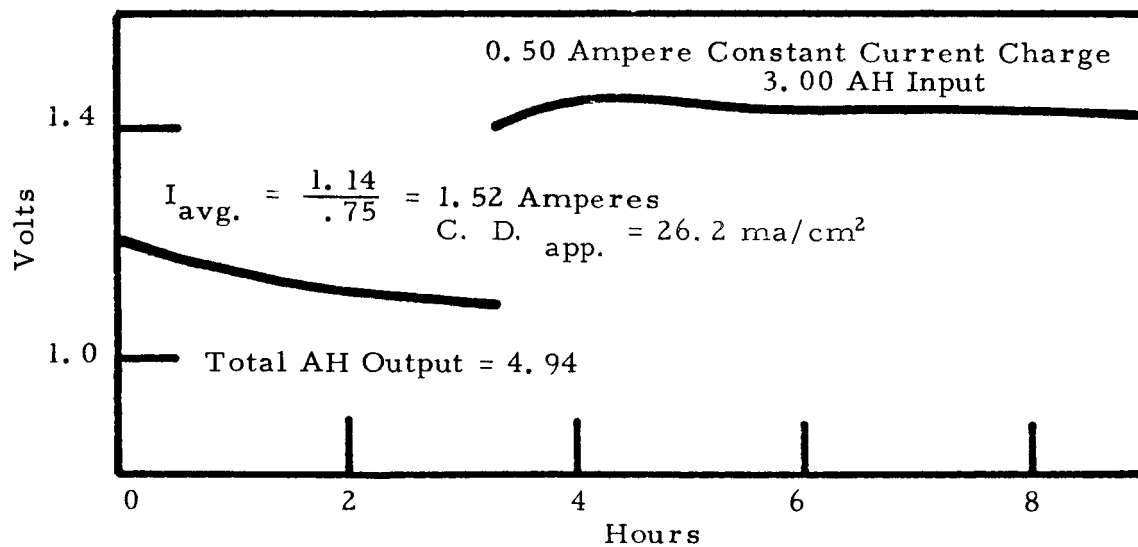

C-3159

FIGURE 6


9TH DISCHARGE OF ZINC-OXYGEN UNIT CELL

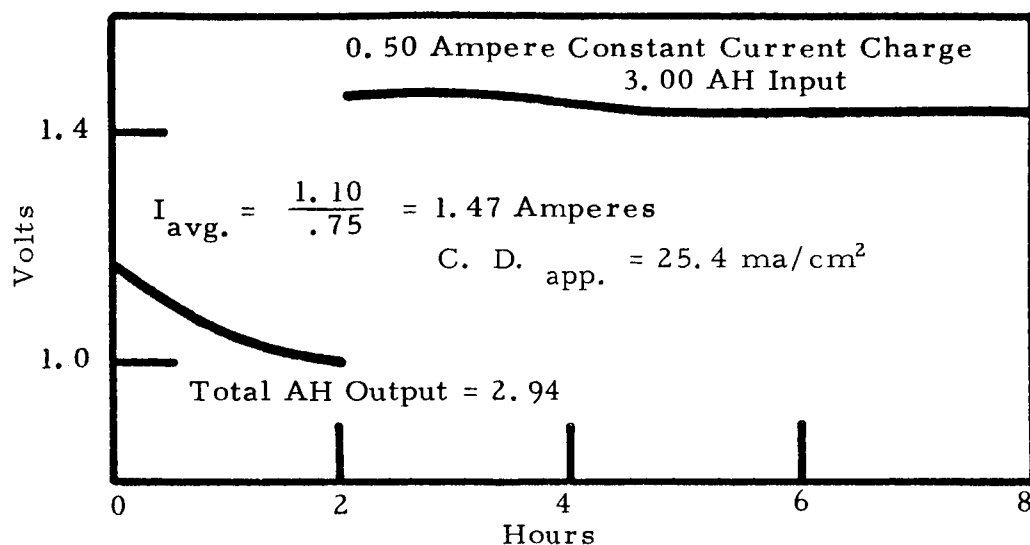

C-3160

FIGURE 7


12TH DISCHARGE OF ZINC-OXYGEN UNIT CELL

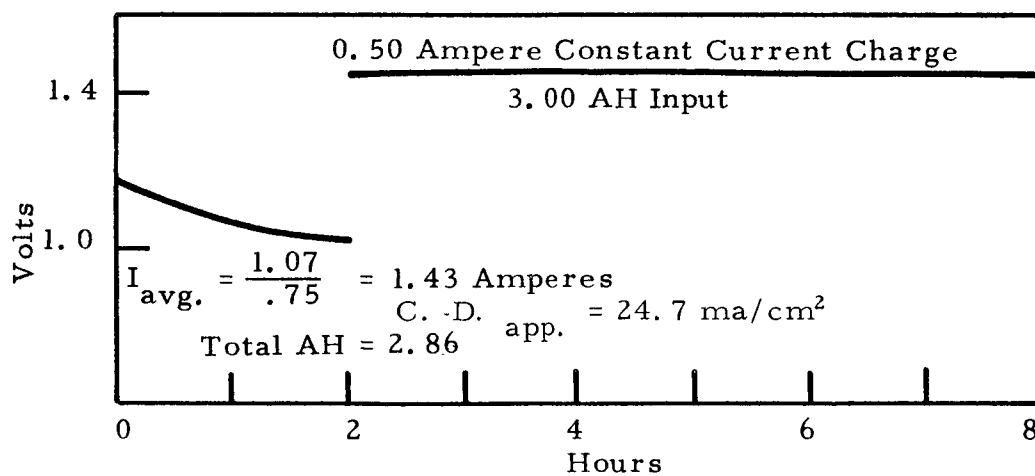

C-3146

FIGURE 8

14TH DISCHARGE OF ZINC-OXYGEN UNIT CELL

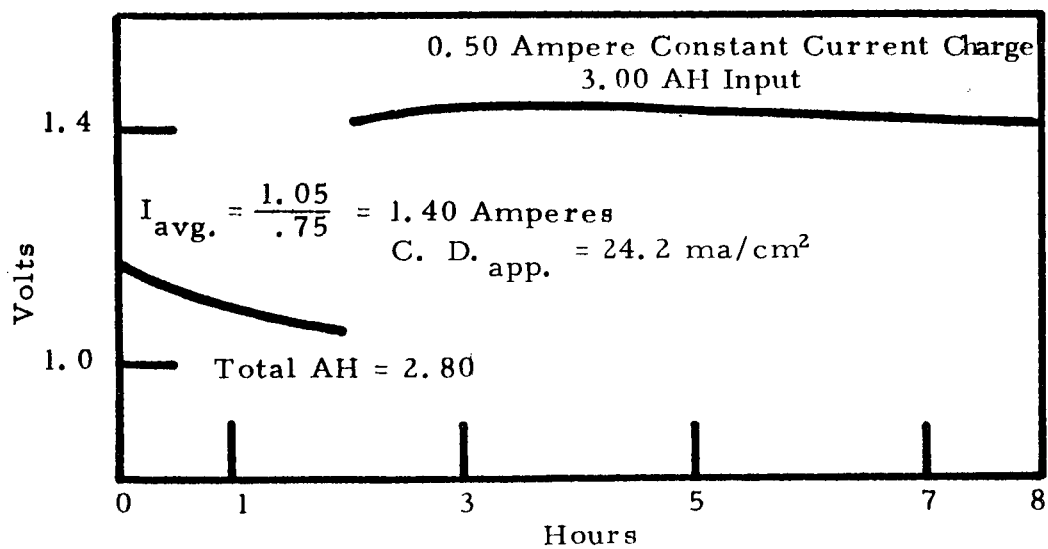

C-3161

NEW TECHNOLOGY

There are no new technological advances falling within the scope of this contract to be reported at this time.

PROGRAM FOR NEXT REPORTING INTERVAL

The work planned for the next reporting interval will be directed largely toward continuing the unit cell characterization and optimization studies which were initiated in the present period. This work will be augmented by additional cell performance evaluation over a broader range of current densities. Specific studies will be conducted to optimize the system for the two-hour discharge, two-hour charge cycle as well as the twenty-four hour discharge and twenty-four hour charge cycle. The two-hour discharge, six-hour charge cycle will continue to be used for intermediate charge cycle evaluation. In addition, cell performance will be evaluated as a function of temperature over the range of 0°C to 40°C. Further, work will be initiated in operation of the system under totally sealed conditions.

CONCLUSIONS AND RECOMMENDATIONS

Unit cell work conducted during this quarter has demonstrated that the zinc-oxygen battery system can be successfully recharged. The best results were obtained using an electrolyte of 38% KOH in which 3.5% ZnO had been dissolved. It was also demonstrated that oxidation of the carbon catalyst layer of the "fixed-zone" oxygen electrode which would normally occur when oxygen is evolved electrochemically at this site during charging can be avoided by the use of a separate nickel charging electrode. Constructional changes in the zinc electrode with respect to the use of a more inert restraining member are also recommended. Additionally, it is recommended that the effect of temperature and pressure upon cell operation be investigated.

BIBLIOGRAPHY

1. K. V. Kordesch, "Low Temperature Fuel Cells," Proc. of IEEE, Vol. 51, No. 5, May, 1963.
2. M. B. Clark, W. G. Darland, and K. V. Kordesch, "Thin and Light-weight Electrodes for Fuel Cells," Proc. of 18th Annual Power Sources Conference, Atlantic City, N. J., May 19-21, 1964.
3. M. B. Clark, W. G. Darland, G. E. Evans, and K. V. Kordesch, "Thin Fuel Cell Electrodes," Final Report, USAEL, Ft. Monmouth, Contract DA-36-039-AMC-02314(E), Period Ending 31 May, 1964, U. S. AECOM (AMSEL-RD-PSC), Fort Monmouth, N. J.
4. M. B. Clark, W. G. Darland, and K. V. Kordesch, "Composite Carbon-Metal Electrodes for Fuel Cells," paper presented at the Electrochemical Society Meeting, Washington, D. C., Oct. 13, 1964.
5. K. V. Kordesch, "Fuel Cells with Carbon Electrodes," paper presented at Fuel Cell Conference, Committee for Energy Conversion, Delegation Generale a la Recherche Scientifique et Technique, Paris, February 23-25, 1965.
6. K. V. Kordesch, "Progress of the Carbon Electrode Fuel Cell," paper presented at 19th Annual Power Sources Conference, Atlantic City, N. J., May 18-20, 1965.
7. K. V. Kordesch, "Carbon-Air Electrodes for Low Temperature Fuel Cells," Fuel Cell Symposium, American Chemical Society Meeting, Atlantic City, N. J., September 12-17, 1965.

OFFICIAL DISTRIBUTION LIST (CONT'D.)

National Aeronautics & Space Admin.
Manned Spacecraft Center
Houston, Texas 77058
Attn: Forrest E. Eastman (EE-4)

National Aeronautics & Space Admin.
Ames Research Center
Pioneer Project
Moffett Field, California 94035
Attn: James R. Swain/A. S. Hertzog

National Aeronautics & Space Admin.
Ames Research Center
Moffett Field, California 94035
Attn: Jon Rubenzer
Biosatellite Project

Jet Propulsion Laboratory
4800 Oak Grove Drive
Pasadena, California 91103
Attn: Aiji Uchiyama

Department of the Army

U. S. Army Engineer R & D Labs.
Fort Belvoir, Virginia 22060
Electrical Power Branch
SMOFB-EP

Commanding Officer
U. S. Army Electronics R&D Labs.
Fort Monmouth, New Jersey 07703
Attn: Power Sources Division
Code SELRA/PS

Research Office
R & D Directorate
Army Weapons Command
Rock Island, Illinois 61201
Attn: Mr. G. Riensmith, Chief

U. S. Army Research Office
Box CM, Duke Station
Durham, North Carolina 27706
Attn: Dr. Wilhelm Jorgensen

Natick Laboratories
Clothing and Organic Materials Div.
Natick, Massachusetts 01760
Attn: Robert N. Walsh/G. A. Spano

Harry Diamond Laboratories
Room 300, Building 92
Conn. Ave. & Van Ness Street, N.W.
Washington, D. C. 20438
Attn: Nathan Kaplan

Army Materiel Command
Research Division
AMCRD-RSCM-T-7
Washington, D. C. 20315
Attn: John W. Crellin

Army Materiel Command
Development Division
AMCRD-DE-MO-P
Washington, D. C. 20315
Attn: Marshall D. Aiken

U. S. Army TRECOM
Fort Eustis, Virginia 23604
Attn: Dr. R. L. Echols (SMOFE-PSG)

U. S. Army TRECOM
Fort Eustis, Virginia 23604
Attn: Leonard M. Bartone (SMOFE-ASE)

U. S. Army Mobility Command
Research Division
Center Line, Michigan 48090
Attn: O. Renius (AMSMO-RR)

Department of the Navy

Office of Naval Research
Washington, D. C. 20360
Attn: Head, Power Branch, Code 429

Office of Naval Research
Department of the Navy
Washington, D. C. 20360
Attn: H. W. Fox, Code 425

Naval Research Laboratory
Washington, D. C. 20390
Attn: Dr. J. C. White, Code 6160

U. S. Navy
Marine Engineering Laboratory
Annapolis, Maryland 21402
Attn: J. H. Harrison

OFFICIAL DISTRIBUTION LIST

NASA and JPL

National Aeronautics & Space Admin.
Scientific and Technical Information
Facility
College Park, Maryland 20740
Attn: NASA Representative
Send 2 copies plus 1 reproducible



National Aeronautics & Space Admin.
Washington, D. C. 20546
Attn: RNW/E. M. Cohn

National Aeronautics & Space Admin.
Washington, D. C. 20546
Attn: FC/A. M. Greg Andrus

National Aeronautics & Space Admin.
Goddard Space Flight Center
Greenbelt, Maryland 20771
Attn: Thomas Hennigan, Code 716.2

National Aeronautics & Space Admin.
Goddard Space Flight Center
Greenbelt, Maryland 20771
Attn: Joseph Sherfey, Code 735

National Aeronautics & Space Admin.
Langley Research Center
Instrument Research Division
Hampton, Virginia 23365
Attn: John L. Patterson, MS-234

National Aeronautics & Space Admin.
Langley Research Center
Instrument Research Division
Hampton, Virginia 23365
Attn: M. B. Seyffert, MS 112

National Aeronautics & Space Admin.
Lewis Research Center
21000 Brookpark Road
Cleveland, Ohio 44135
Attn: N. D. Sanders, MS 302-1

National Aeronautics & Space Admin.
Lewis Research Center
21000 Brookpark Road
Cleveland, Ohio 44135
Attn: R. L. Cummings, MS 500-201

National Aeronautics & Space Admin.
Lewis Research Center
21000 Brookpark Road
Cleveland, Ohio 44135
Attn: R. R. Miller, MS 500-202

National Aeronautics & Space Admin.
Geo. C. Marshall Space Flight Center
Huntsville, Alabama 35812
Attn: Philip Youngblood

National Aeronautics & Space Admin.
Geo. C. Marshall Space Flight Center
Huntsville, Alabama 35812
Attn: Richard Boehme
Bldg. 4487-BB

National Aeronautics & Space Admin.
Manned Spacecraft Center
Houston, Texas 77058
Attn: William R. Dusenbury
Propulsion & Energy Systems Branch
Bldg. 16, Site 1

National Aeronautics & Space Admin.
Manned Spacecraft Center
Houston, Texas 77058
Attn: Robert Cohen
Gemini Project Office

National Aeronautics & Space Admin.
Manned Spacecraft Center
Houston, Texas 77058
Attn: Richard Ferguson (EP-5)

National Aeronautics & Space Admin.
Manned Spacecraft Center
Houston, Texas 77058
Attn: James T. Kennedy (EE-5)

OFFICIAL DISTRIBUTION LIST (CONT'D.)

Bureau of Naval Weapons
Department of the Navy
Washington, D. C. 20360
Attn: Whitewell T. Beatson
(Code RAAE-52)

Bureau of Naval Weapons
Department of the Navy
Washington, D. C. 20360
Attn: Milton Knight (Code RAAE-50)

Naval Ammunition Depot
Crane, Indiana 47522
Attn: E. Bruess/H. Schultz

Naval Ordnance Laboratory
Department of the Navy
Corona, California 91720
Attn: William C. Spindler (Code 441)

Naval Ordnance Laboratory
Department of the Navy
Silver Spring, Maryland 20900
Attn: Philip B. Cole (Code WB)

Bureau of Ships
Department of the Navy
Washington, D. C. 20360
Attn: C. F. Viglotti (Code 660)

Bureau of Ships
Department of the Navy
Washington, D. C. 20360
Attn: Bernard B. Rosenbaum (Code 340)

Department of the Air Force

Space Systems Division
Los Angeles AF Station
Los Angeles, California 90045
Attn: SSSD

Flight Vehicle Power Branch
Aero Propulsion Laboratory
Wright-Patterson AFB, Ohio 45433
Attn: James E. Cooper

Air Force Cambridge Research Lab.
L. G. Hanscom Field
Bedford, Massachusetts 01731
Attn: Commander (CRO)

Rome Air Development Center, ESD
Griffis AFB, New York 13442
Attn: Frank J. Mollura (RASSM)

Other Government Agencies

National Bureau of Standards
Washington, D. C. 20234
Attn: Dr. W. J. Hamer

Office, DDR&E, USE & BSS
The Pentagon
Washington, D. C. 20310
Attn: G. B. Wareham

Mr. Donald B. Hoatson
Army Reactors, DRD
U. S. Atomic Energy Commission
Washington, D. C. 20545

Private Organizations

Aerojet-General Corporation
Chemical Products Division
Azusa, California 91702
Attn: Dr. S. O. Rosenberg

Aeronutronic Division
Philco Corporation
Ford Road
Newport Beach, California 92660

Aerospace Corporation
P. O. Box 95085
Los Angeles, California 90045
Attn: Library

Allis-Chalmers Manufacturing Co.,
1100 South 70th Street
Milwaukee, Wisconsin 53201
Attn: Dr. P. Joyner

American University
Mass. & Nebraska Avenues, N.W.
Washington, D. C. 20016
Attn: Dr. R. T. Foley,
Chemistry Department

Arthur D. Little, Inc.,
Acorn Park
Cambridge, Massachusetts 02140
Attn: Dr. Ellery W. Stone

OFFICIAL DISTRIBUTION LIST (CONT'D.)

Atomics International Division
North American Aviation, Inc.
8900 De Sota Avenue
Canoga Park, California 91304
Attn: Dr. H. L. Recht

Battelle Memorial Institute
505 King Avenue
Columbus, Ohio 43201
Attn: Dr. C. L. Faust

Bell Laboratories
Murray Hill, New Jersey 07971
Attn: U. B. Thomas/D. A. Feder

The Boeing Company
P. O. Box 98124
Seattle, Washington 98124

Borden Chemical Company
Central Research Lab.
P. O. Box 9524
Philadelphia, Pennsylvania 19124

Burgess Battery Company
Foot of Exchange Street
Freeport, Illinois 61032
Attn: Dr. Howard J. Strauss

C & D Batteries
Division of Electric Autolite Co.
Conshohocken, Pennsylvania 19428
Attn: Dr. Eugene Willihnganz

Calvin College
Grand Rapids, Michigan 49506
Attn: Prof. T. P. Dirkse

Catalyst Research Corporation
6101 Falls Road
Baltimore, Maryland 21209
Attn: J. P. Wooley

ChemCell Inc.
3 Central Avenue
East Newark, N. J. 07029
Attn: Peter D. Richman

Delco Remy Division
General Motors Corporation
2401 Columbus Avenue
Anderson, Indiana 46011
Attn: Dr. J. J. Lander

Douglas Aircraft Company, Inc.
Astropower Laboratory
2121 Campus Drive
Newport Beach, California 92663
Attn: Dr. Carl Berger

Dynatech Corporation
17 Tudor Street
Cambridge, Massachusetts 02138
Attn: R. L. Wentworth

Eagle-Picher Company
Post Office Box 47
Joplin, Missouri 64802
Attn: E. M. Morse

Elgin National Watch Company
107 National Street
Elgin, Illinois 60120
Attn: T. Boswell

Electric Storage Battery Co.
Missile Battery Division
2510 Louisburg Rd.
Raleigh, North Carolina 27604
Attn: A. Creitzberg

Electric Storage Battery Co.
Carl F. Norberg Research Center
19 West College Avenue
Yardley, Pennsylvania 19068
Attn: Dr. R. A. Schaefer

Electrochimica Corporation
1140 O'Brien Drive
Menlo Park, California 94025
Attn: Dr. Morris Eisenberg

Electro-Optical Systems, Inc.
300 North Halstead
Pasadena, California 91107
Attn: E. Findl

OFFICIAL DISTRIBUTION LIST (CONT' D.)

Emhart Manufacturing Co.
Box 1620
Hartford, Connecticut 06101
Attn: Dr. W. P. Cadogan

Engelhard Industries, Inc.
497 DeLancy Street
Newark, New Jersey 07105
Attn: Dr. J. G. Cohn

Dr. Arthur Fleischer
466 South Center Street
Orange, New Jersey 07050

General Electric Company
Schenectady, New York, 12301
Attn: Dr. R. C. Oshoff/Dr. W. Carson
Advanced Technology Lab.

General Electric Company
Missile & Space Division
Spacecraft Department
P.O. Box 8555
Philadelphia, Pennsylvania 19101
Attn: E. W. Kipp, Room T-2513

General Electric Company
Battery Products Section
P.O. Box 114
Gainesville, Florida 32601

General Electric Company
Research Laboratories
Schenectady, New York 12301
Attn: Dr. H. Liebhafsky

General Motors-Defense Research Labs.
6767 Hollister Street
Santa Barbara, California 93105
Attn: Dr. J. S. Smatko/Dr. C. R. Russell

Globe-Union, Incorporated
900 East Keefe Avenue
Milwaukee, Wisconsin 53201

Gould-National Batteries, Inc.
Engineering and Research Center
2630 University Avenue, S.E.
Minneapolis, Minnesota 55418
Attn: J. F. Donahue

Gulton Industries
Alkaline Battery Division
212 Durham Avenue
Metuchen, New Jersey 08840
Attn: Dr. Robert Shair

Hughes Aircraft Corporation
Centinda Avenue & Teale St.
Culver City, California 90230
Attn: T. V. Carvey

Hughes Aircraft Corporation
Bldg. 366, M. S. 524
El Segundo, California 90245
Attn: R. B. Robinson

Hughes Research Laboratories Corp.
3011 Malibu Canyon Rd.
Malibu, California 90265

ITT Research Institute
10 West 35th Street
Chicago, Illinois 60616
Attn: Dr. H. T. Francis

Institute for Defense Analyses
R&E Support Division
400 Army-Navy Drive
Arlington, Virginia 22202
Attn: Mr. R. Hamilton/Dr. Szego

Idaho State University
Department of Chemistry
Pocatello, Idaho 83201
Attn: Dr. G. Myron Arcand

Institute of Gas Technology
State and 34th Street
Chicago, Illinois 60616
Attn: B. S. Baker

John Hopkins University
Applied Physics Laboratory
8621 Georgia Avenue
Silver Spring, Maryland 20910
Attn: Richard Cole

Johns-Manville R&E Center
P. O. Box 159
Manville, New Jersey 08835
Attn: J. S. Parkinson

OFFICIAL DISTRIBUTION LIST (CONT'D.)

Leesona Moos Laboratories
Lake Success Park, Community Drive
Great Neck, New York 11021
Attn: Dr. H. Oswin

Livingston Electronic Corporation
Route 309
Montgomeryville, Pennsylvania 18936
Attn: William F. Meyers

Lockheed missiles & Space Company
3251 Hanover Street
Palo Alto, California 93404
Attn: Library

Mallory Battery Company
60 Elm Street
North Tarrytown, New York 10593
Attn: R. R. Clune

P. R. Mallory & Co., Inc.
Northwest Industrial Park
Burlington, Massachusetts 02103
Attn: Dr. Per Bro

P. R. Mallory & Co., Inc.
3029 E. Washington Street
Indianapolis, Indiana 46206
Attn: Technical Librarian

Melpar
Technical Information Center
3000 Arlington Blvd.
Falls Church, Virginia 22046

Metals and Controls Division
Texas Instruments, Inc.
34 Forest Street
Attleboro, Massachusetts 02703
Attn: Dr. E. M. Jost

Midwest Research Institute
425 Volker Blvd
Kansas City, Missouri 64110
Attn: Dr. B. W. Beadle

Monsanto Research Corporation
Everett, Massachusetts 02149
Attn: Dr. J. O. Smith

North American Aviation, Inc.
Rocketdyne Division
6633 Canoga Avenue
Canoga Park, California 91303
Attn: Library

North American Aviation, Inc.
12214 Lakewood Boulevard
Downey, California 90241
Attn: Burton M. Otzinger

Dr. John Owen
P. O. Box 87
Bloomfield, New Jersey 07003

Power Information Center
University of Pennsylvania
Moore School Building
200 South 33rd Street
Philadelphia, Pennsylvania 19104

Power Sources Division
Whittaker Corporation
9601 Canoga Avenue
Chatsworth, California 91311
Attn: Dr. M. Shaw

Philco Corporation
Division of the Ford Motor Co.
Blue Bell, Pennsylvania 19422
Attn: Dr. Phillip Cholet

Radiation Applications, Inc.
36-40 37th Street
Long Island City, New York 11101

Radio Corporation of America
Astro Division
Hightstown, New Jersey 08520
Attn: Seymour Winkler

Radio Corporation of America
P. O. Box 800
Princeton, New Jersey 08540
Attn: I. Schulman

Radio Corporation of America
Somerville, New Jersey 08873
Attn: Dr. H. S. Lozier

Southwest Research Institute
8500 Culebra Road
San Antonio, Texas 78206
Attn: Dr. Jan Al

Sonotone Corporation
Saw Mill River Road
Elmsford, New York 10523
Attn: A. Mundel

Texas Instruments, Inc.
13500 North Central Expressway
Dallas, Texas 75222
Attn: Dr. Isaac Trachtenberg

Thomas A. Edison Research Laboratory
McGraw Edison Company
Watchung Avenue
West Orange, New Jersey 07052
Attn: Dr. P. F. Grieger

TRW Systems, Inc.
One Space Park
Redondo Beach, California 90278
Attn: Dr. A. Krausz, Bldg. 60, Rm 929

TRW Systems Inc.
One Space Park
Redondo Beach, California 90278
Attn: Dr. Herbert P. Silverman

TRW, Inc.
23555 Euclid Avenue
Cleveland, Ohio 44117
Attn: Librarian

Tyco Laboratories, Inc.
Bear Hill
Hickory Drive
Waltham, Massachusetts 02154
Attn: W. W. Burnett

Union Carbide Corporation
Development Laboratory Library
P. O. Box 6056
Cleveland, Ohio 44101

Union Carbide Corporation
Parma Research Center
P. O. Box 6116
Cleveland, Ohio 44101
Attn: Library

University of California
Space Science Laboratory
Berkeley, California 94720
Attn: Dr. C. W. Tobias

University of Pennsylvania
Electrochemistry Laboratory
Philadelphia, Pennsylvania 19104

Western Electric Company
Suite 802, RCA Bldg.,
Washington, D.C. 20006
Attn: R. T. Fiske

Westinghouse Electric Corporation
Research & Development Center
Churchill Borough
Pittsburgh, Pennsylvania 15235

Whittaker Corporation
P. O. Box 337
Newbury Park, California 91320
Attn: Mr. John Rhyne

Whittaker Corporation
3850 Olive Street
Denver, Colorado 80237
Attn: Borch Wendir

Yardney Electric Corporation
40-50 Leonard Street
New York, New York 10013
Attn: Dr. Geo. Dalin